FRP Kiosks & Shelters

Model: FKS Series (IP55 Kiosk)

- Double leaf door in front.
- Ingress protection to IP55
- Wall thickness 6 mm commonly and 10mm at stress points.
- Insulated construction with polyurethane foam encapsulated with FRP
- Heavy duty butt hinges of stainless steel
- Heavy duty three-point handle locking
- Wind stays on each door
- Lifting hooks
- Provisions for inner lightings and door operated limit switch
- Provisions to install AC unit, JB, FACP, anti-condensation heaters, fire extinguisher, smoke detector and other components
- All hardware of stainless steel
- Customizable with different accessories & dimensions




Options

- Higher wall thickness
- Single skin construction
- Anti-vandal construction with WBP plywood encapsulated with FRP
- Higher fire rating
- Emergency exit door
- Access to auxiliary power supply

All dimensions are in mm

S.No. Model Number	External Size		
	h	W	d
FKS200100110	2000	1000	1100
FKS200200110	2000	2000	1100
FKS250100110	2500	1000	1100
FKS250200160	2500	<mark>20</mark> 00	1600
FKS250400210	2500	4000	2100
FKS300500310	3000	5000	3100
FKS300600410	10113000DIEC	<mark>60</mark> 00	4100
	FKS200100110 FKS200200110 FKS250100110 FKS250200160 FKS250400210 FKS300500310	h FKS200100110 2000 FKS200200110 2000 FKS250100110 2500 FKS250200160 2500 FKS250400210 2500 FKS300500310 3000	Model Number h w FKS200100110 2000 1000 FKS200200110 2000 2000 FKS250100110 2500 1000 FKS250200160 2500 2000 FKS250400210 2500 4000 FKS300500310 3000 5000

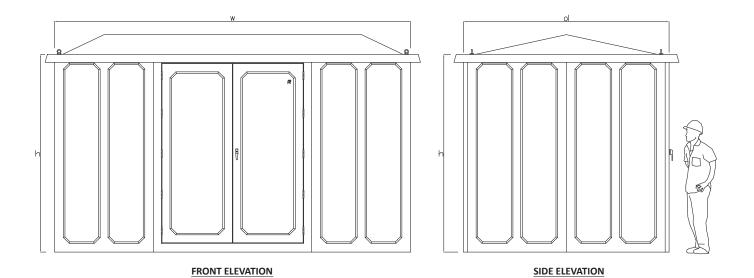

FRPINDUSTRES