

## Model: FSL Series (Shelters)

- Single leaf self-locking access door with safety glass & anti-panic bar
- Ingress protection to IP55
- Wall thickness 6 mm commonly and 10mm at stress points.
- Insulated construction with polyurethane foam encapsulated with FRP
- Heavy duty FRP or metal flooring.
- Heavy duty butt hinges of stainless steel
- Provisions for inner lightings and door operated limit switch
- Provisions to install AC unit, JB, FACP, anti-condensation heaters, fire extinguisher, smoke detector and other components
- All hardware of stainless steel
- Customizable with different accessories & dimensions




## ► Options


- Higher wall thickness
- Anti-vandal construction with WBP plywood encapsulated with FRP
- Higher fire rating
- Air lock chamber
- Additional sunshade

All dimensions are in mm

S.No.	Model Number	External Size		
		h	w	d
1	FSL250200160	2500	2000	1600
2	FSL250400210	2500	4000	2100
3	FSL300500310	3000	5000	3100
4	FSL300600410	3000	6000	4100

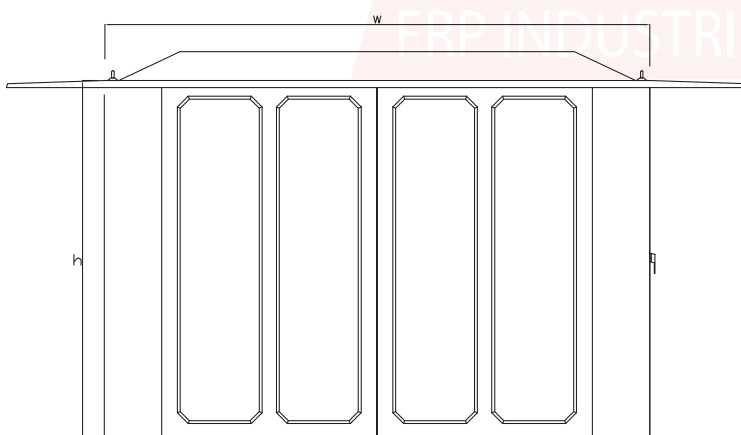

**SIDE ELEVATION**

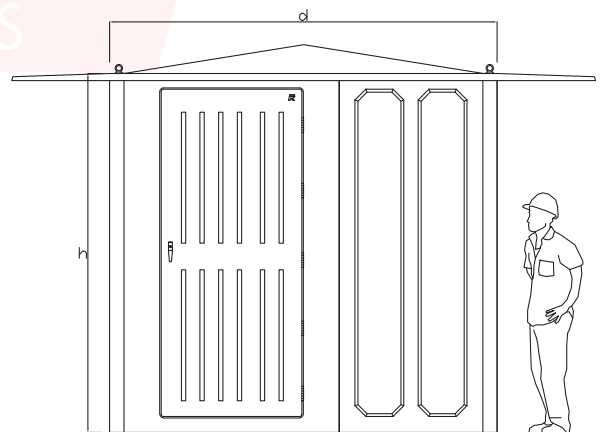

**FRONT ELEVATION**

Disclaimer: FRP Industries reserves the right to amend the design shown in this document without prior notice