






## SOAKER PANELS-ROOF CURBS


Our FGRP soaker panels-roof curbs are manufactured by high quality polyester gelcoats, resins and E-class glass fibre. These panels are weatherproof, UV resistant, corrosion resistant and suitable for outdoor use in harsh weather conditions of high humidity & temperature dominant in gulf region. Our soaker panels-roof curbs are technically the precise solution to offer a full waterproof joining between roof cladding and any projection above roof level. These projections are generally due to Smoke vents, exhaust fans, skylight, column beams, chimneys etc. These panels can be manufactured in a variety of dimensions with square, rectangular and circular openings. Our FGRP soaker panels-roof curbs have design life in excess of 40 years.

Our soaker panels-roof curbs have standard thickness 1.5 mm in profile area and 3 mm in up-stand area. The standard colour is light grey shade to RAL 7035 for exterior finish. Higher thickness and other colours can be manufactured up on order.


### PRODUCT ARRAY

Our soaker panels-roof curbs have following choices:


-  Profiled panels with square/rectangular/circular opening
-  Flat panels with square/rectangular/circular opening
-  Insulated profiled panels with square/rectangular/circular opening
-  Split type panels for pre-existing projections
-  Fire proof panels

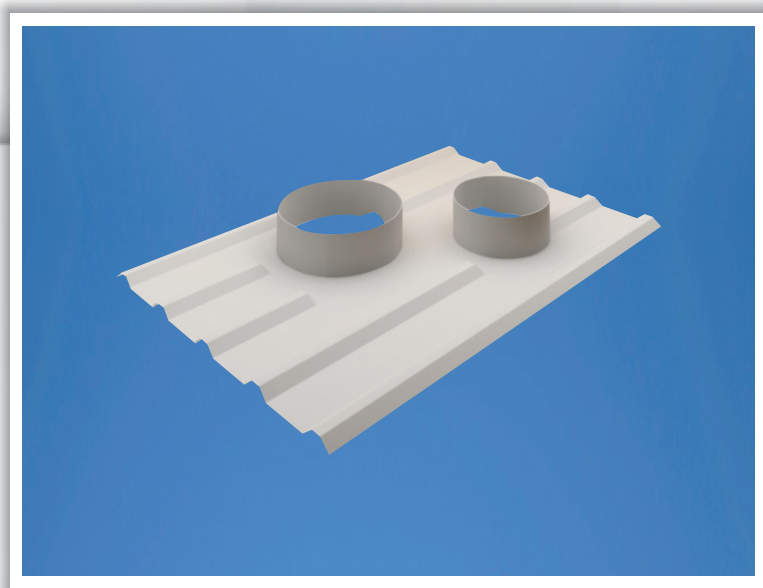

Soaker Panel  
with multiple openings

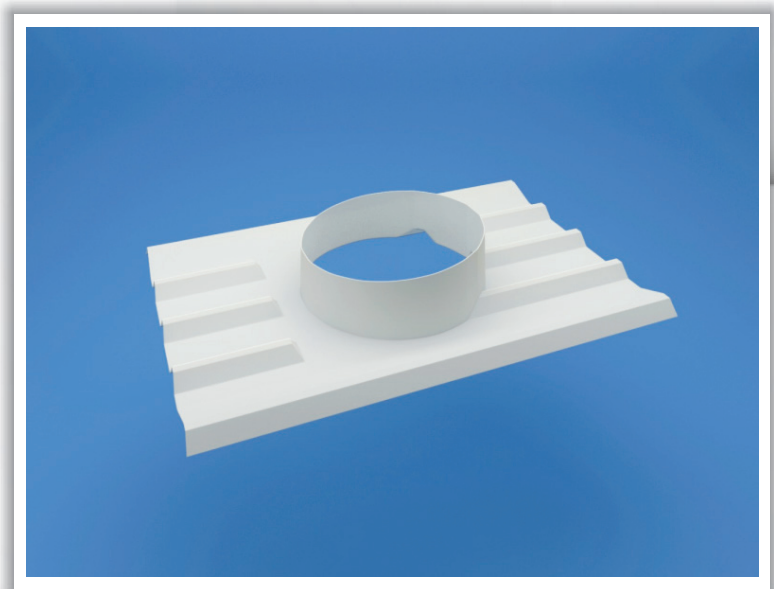

Soaker Panel  
with circular opening

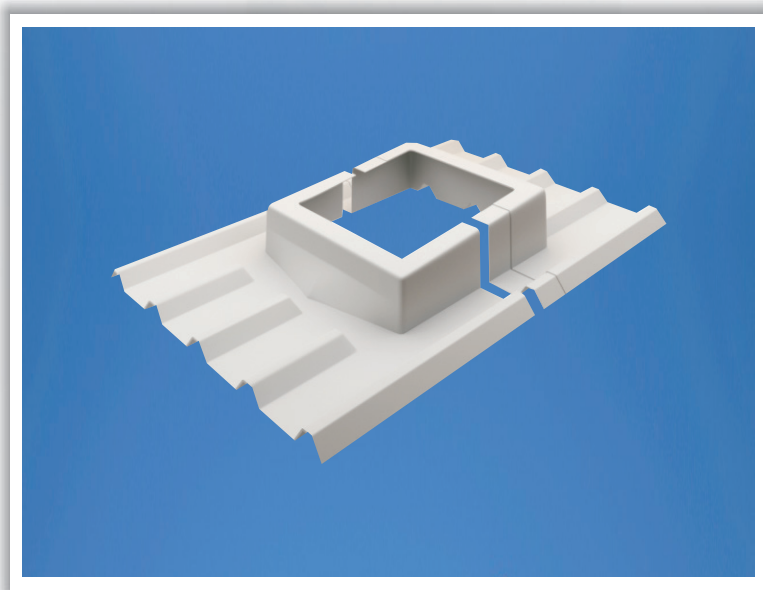

Soaker panel split type